

CARACTERÍSTICAS TÉCNICAS

PVC flexible

ALTIMSA

PUERTAS AUTOMÁTICAS

E-mail: oficinatecnica@altimsa.com


TEL: 971 07 50 73

BALEAR S.L.

MANTENIMIENTOS

INDUSTRIALES

<http://www.altimsa.com>

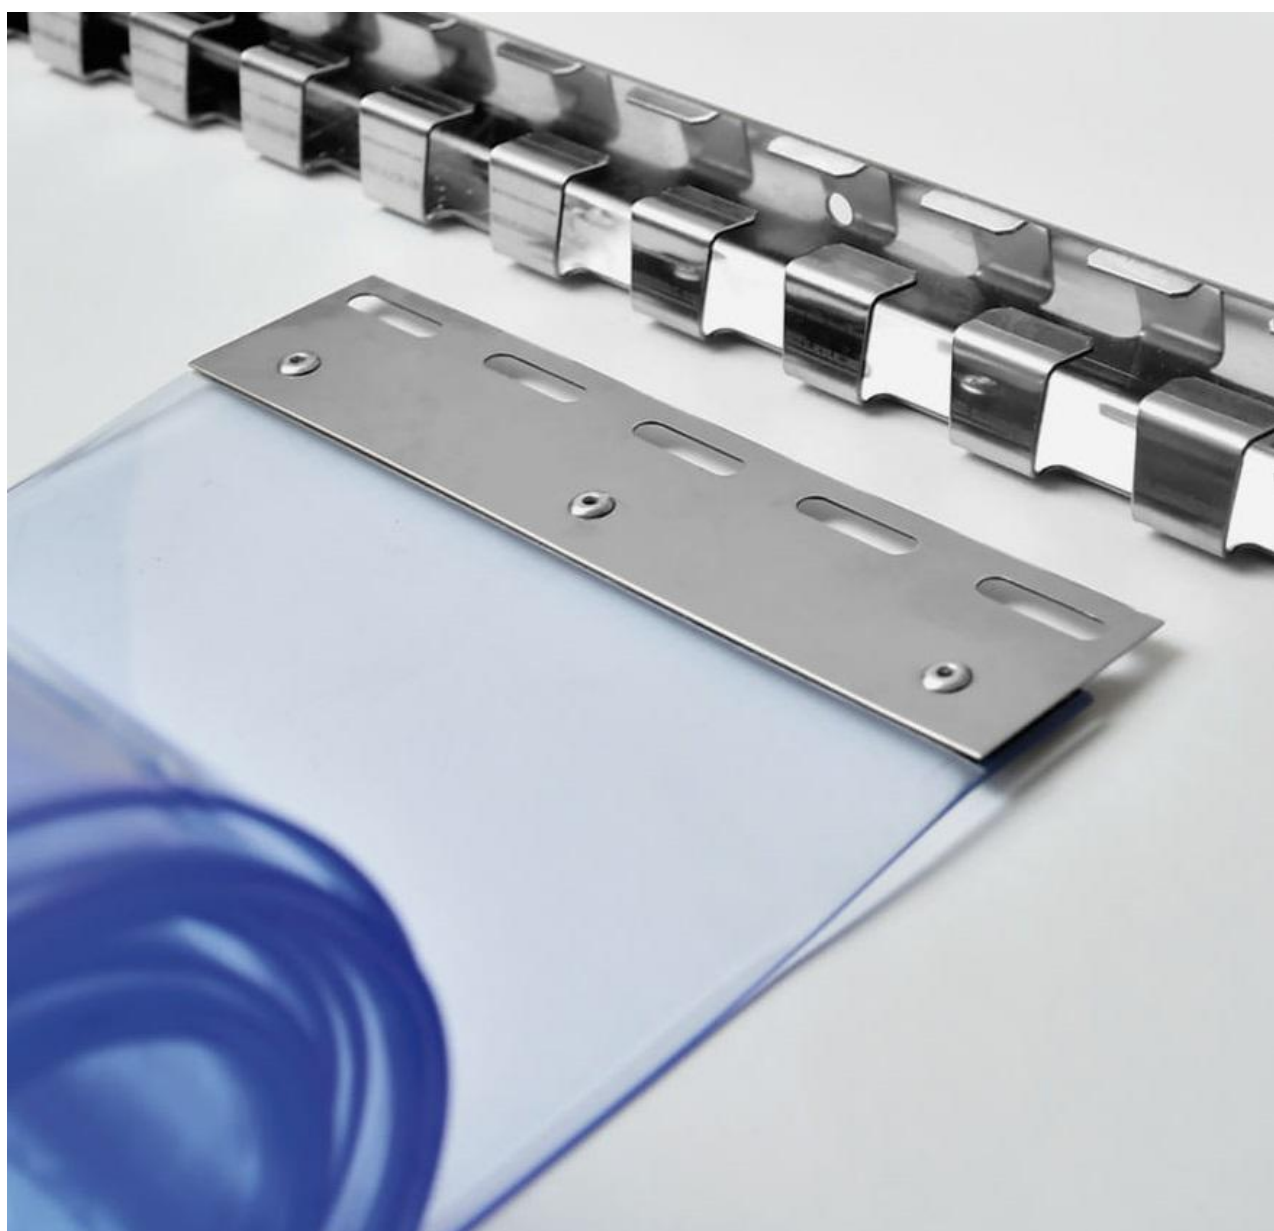



Características Técnicas PVC Flexible

PROPERTIES	UNIT	TEST METHOD	STANDARD	POLAR
Shore "A" Hardnes	-	DIN53 505	75	65
Specific Density	g/cm ³	DIN 53 479	1.22	1.2
Temperature Resistance	°C	-	+50/-20	+35/-40
Flexibility	°C	-	-35	-40
Cold Bend Brittle Point	°C	DIN 53 372	-35	-45
Elongation at Break	%	DIN 53 455	360	400
Tensile Strength	n/mm ²	DIN 53 455	17	13
Water Absorption	Mg	DIN 53 472	17	21
Light Transmittance	%	ASTM D 1003	>80	>75
Sound Protection	dB	DIN 52 210	>35	>35
Flammability/Reaction to Fire	-	DIN 53 382	Self extinguishing	

TODAS NUESTRAS LAMAS Y ROLLOS RESISTEN LOS RAYOS UV